

Art. NTS48S



FLOOR CLOSER






THERMOSTATIC OIL
-18°C +50°C



TESTED TO ENSURE
STABLE CLOSING TIMES
TO THE DIFFERENT
TEMPERATURE



PATENTED AND TESTED
IN ACCORDING TO THE EUROPEAN STANDARD
UNI-EN 1154:2003

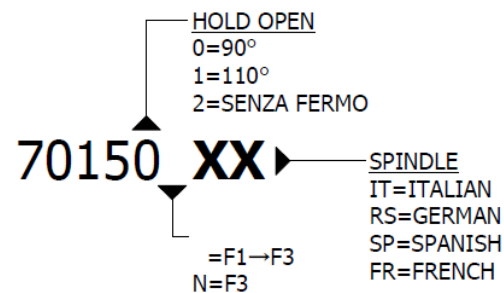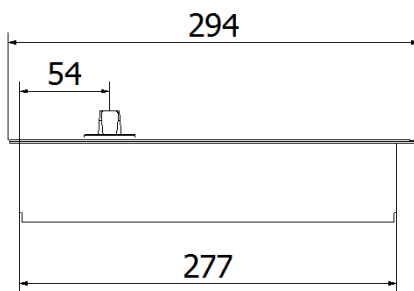




SERIES	ARTICLES	FORCE	HOLD OPEN	WEIGHT [KG]	WIDTH UP TO [MM]
NTS48S	70150	F1→F3	90°	120	700-1000
	70151	F1→F3	110°	120	700-1000
	70152	F1→F3	NO STOP	120	700-1000
	70150N	F3	90°	100	800-900
	70151N	F3	110°	100	800-900
	70152N	F3	NO STOP	100	800-900
	ARTICLE	DESCRIPTION	FINISH	CODE	
	COVER	STAINLESS STEEL	INOX		
		POLISHED BRASS	OT.LUX		

*THE STANDARD PACKAGE INCLUDES BOX CASE AND STAINLESS STEEL COVER AISI 304

PRODUCT DESIGNED AND MANUFACTURED IN ITALY


A. Vavassori

TECHNICAL DETAILS

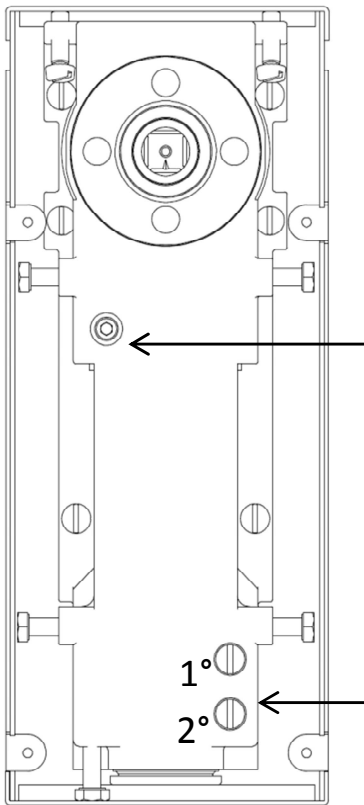

CLOSING ACTION


MAX DOOR OPENING 180°
 AUTOMATICALLY HYDRAULIC CLOSING FROM 135° OF OPENING

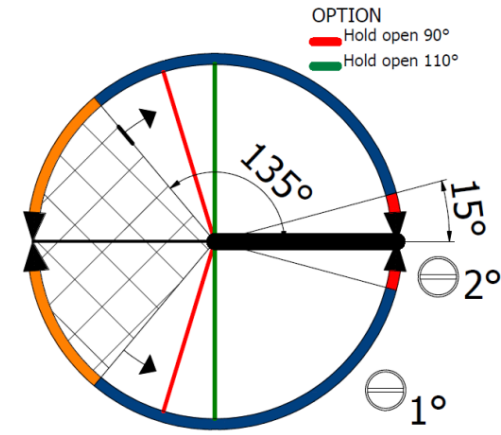

THERMOSTATIC OIL
 -18°C +50°C

TESTED TO ENSURE
 STABLE CLOSING TIMES
 TO THE DIFFERENT TEMPERATURE



FLOOR CLOSER FIXED SPINDLES

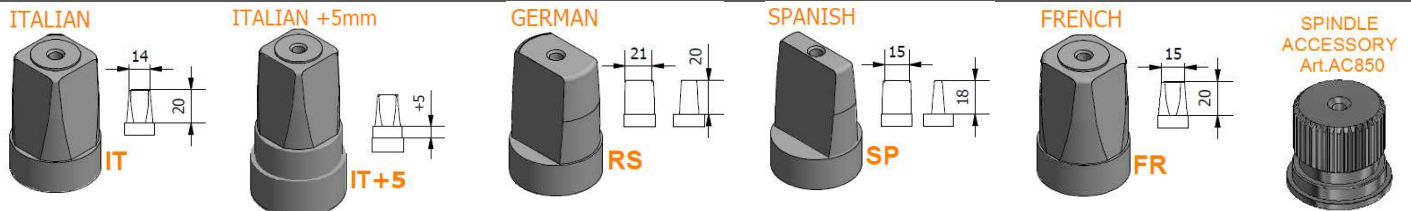

EXTENSIONER SPINDLE



EXTENSIONER +29MM
 ITALIAN SPINDLE

ARTICLE
 40050



EXTENSIONER +29MM
 GERMAN SPINDLE

ARTICLE
 40050 RS



CERTIFICATION UNI EN 1154:2003



PATENTED AND TESTED
 IN ACCORDING TO THE
 EUROPEAN STANDARD
 UNI-EN 1154:2003

Art. NTS XXX

